



- NOTES:
1. USE 16 GAUGE STEEL FOR CABINET.
  2. THE TOP SHELF SHALL SLIDE IN OR OUT WITH THE TOP DOOR OPEN.
  3. ALL HINGES AND HASPS WILL BE WELDED TO THE CABINET.
  4. ALL EDGES SHALL BE GROUND SMOOTH.
  5. TWO (2" DIA.) ACCESS HOLES WILL BE REQUIRED FOR EACH SHELF.
  6. CABINET SHALL BE PAINTED WITH TWO COATS OF FLAT PAINT.
  7. 2 EACH MATCHING KEY PADLOCKS, WITH 3 KEYS PROVIDED, MASTER MODEL 3 T OR EQUIVALENT.
  8. 4 EACH PLAIN STEEL, NON-REMOVABLE PIN, NO HOLE 4"x4" SQUARE CORNER HINGES TO BE WELDED ON.
  9. 2 EACH EXTRA HEAVY, PLAIN STEEL, FIXED STAPLE, NO HOLE, 7 1/4 " HASPS TO BE WELDED ON.

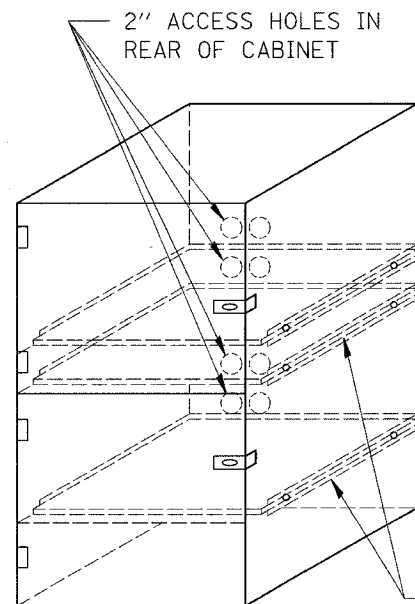

FLAT STOCK DIMENSIONS VARY DEPENDING ON TYPE OF ROLLER ASSEMBLY.


### LOCKABLE COMPUTER CABINET

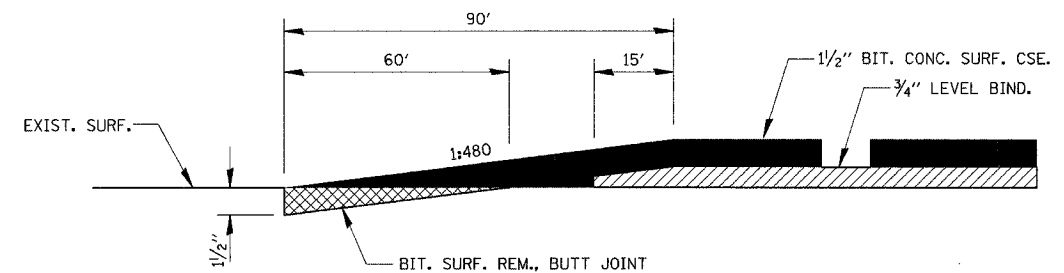

### BUTT JOINT DETAIL


STA. 422+50 TO STA. 423+40 IL 18  
STA. 429+25 TO STA. 430+15 IL 18  
STA. 566+75.80 TO STA. 567+65.80 IL 89  
STA. 569+98.95 TO STA. 570+88.95 IL 89

- NOTES:
1. REFER TO ARTICLE 406.18 OF THE STANDARD SPECIFICATIONS.
  2. BITUMINOUS SURFACE REMOVAL - BUTT JOINT WILL BE PAID FOR AT THE CONTRACT UNIT PRICE PER SQ. YD. FOR BITUMINOUS SURFACE REMOVAL - BUTT JOINT.

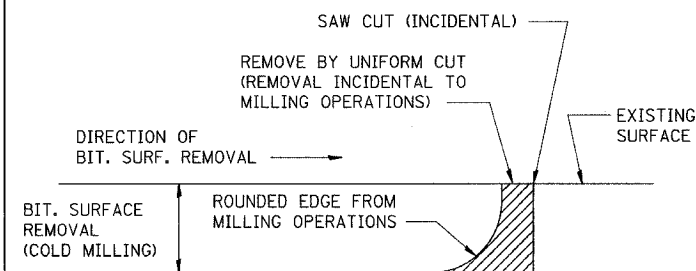

NOTE: WHEN MILLING OPERATIONS PRODUCE A ROUNDED EDGE, THEN A SAW CUT SHALL BE USED TO MANUFACTURE A PERPENDICULAR EDGE AS SHOWN IN THE DETAIL. THE ENGINEER SHALL BE THE SOLE JUDGE CONCERNING THE USE OF THIS DETAIL

### BITUMINOUS DETAIL AT BUTT JOINTS

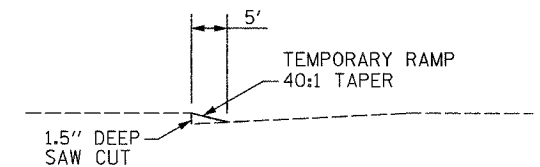

### TEMPORARY RAMP DETAIL

STA. 422+50 TO STA. 422+55 IL 18  
STA. 430+10 TO STA. 430+15 IL 18  
STA. 566+75.80 TO STA. 566+80.80 IL 89  
STA. 570+83.95 TO STA. 570+88.95 IL 89

REVISIONS		ILLINOIS DEPARTMENT OF TRANSPORTATION	
NAME	DATE	DISTRICT CADD STANDARD	
		LOCKABLE COMPUTER CABINET, BITUMINOUS BUTT JOINT AND TEMPORARY RAMP DETAILS	
		SCALE: VERT. HORIZ.	DRAWN BY CADD
		DATE	CHECKED BY